



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁷ : H04Q 7/30, H04M 7/00, H04L 12/28		A1	(11) International Publication Number: WO 00/33590
			(43) International Publication Date: 8 June 2000 (08.06.00)
(21) International Application Number: PCT/SE99/02164		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 23 November 1999 (23.11.99)			
(30) Priority Data: 60/110,811 3 December 1998 (03.12.98) US 09/396,252 15 September 1999 (15.09.99) US			
(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).			
(72) Inventors: VO, Kim, Phuc; 6376 Avenue de Montmagny, Montreal, Quebec H4E 4K6 (CA). HASAN, Suhail; Apartment 425, 3450 Rue Drummond, Montreal, Quebec H3G 1Y3 (CA). BERTRAND, Jean-François; 8585 De Gaspe, Montreal, Quebec H2P 2K3 (CA).			
(74) Agent: KLAS, Norin; Ericsson Radio Systems AB, Common Patent Department, S-164 80 Stockholm (SE).		<p>Published</p> <p>With international search report.</p> <p>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>	

(54) Title: END-TO-END CODER/DECODER (CODEC)

(57) Abstract

A method of reducing speech delay and improving speech quality in digital transmission systems by implementing a single coder-decoder (codec) for an entire speech path from a calling party (21) to a called party (29, 52). The method is applicable to calls between mobile subscribers (21, 29) and between a mobile subscriber (21) and an H.323 client terminal (52) in a data network. After obtaining location information for the called party, an indication of a requested codec is sent from the calling party to the called party utilizing Integrated Services Data Network User Part (ISUP) or Primary Rate Interface (PRI) out-of-band signaling during call setup. If the called party supports the requested codec, a confirmation of the

requested codec is sent from the called party to the calling party. A speech path is then established between the parties, and a single codec translation is performed for the entire speech path. If the called party does not support the calling party's codec, but the serving MSCs (23, 27) for both parties support the calling party's codec, the calling party's codec is utilized all the way to the called party's serving MSC. One additional codec translation is then performed in the called party's serving MSC to convert to the codec supported by the called party.

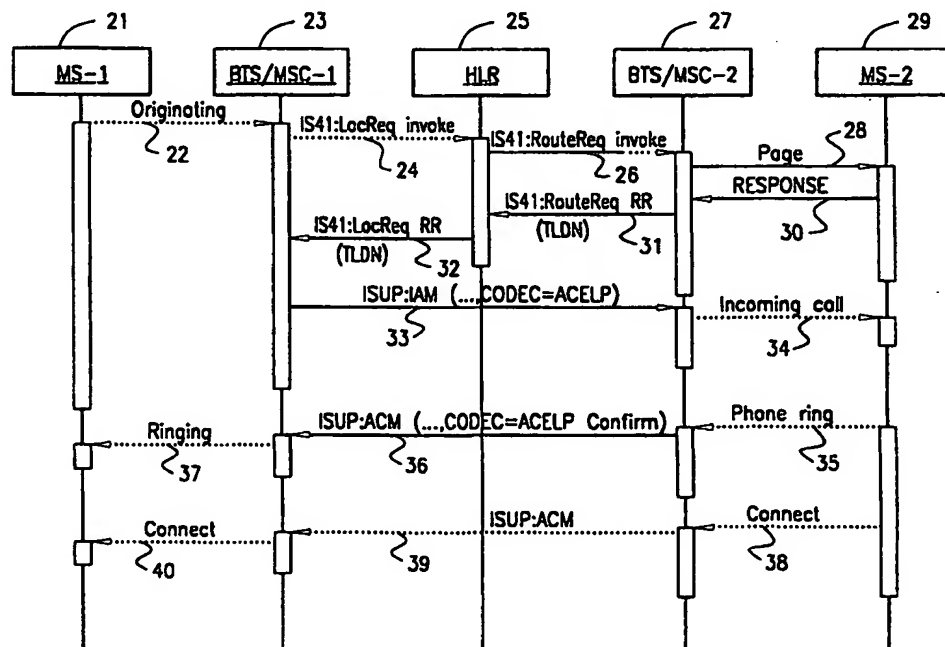

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

END-TO-END CODER/DECODER (CODEC)

PRIORITY STATEMENT UNDER 35 U.S.C. § 119(e) & 37 C.F.R. § 1.78

5 This nonprovisional application claims priority based upon the prior U.S. provisional patent application entitled, "System and Method for Providing Mobile Stations in a Radio Telecommunications Network With Multimedia Services Over Packet-Based Networks", application number 60/110,811, filed December 3, 1998, in the names of Hung Tran, Kim Vo, Bartosz Balazinaki, Jean-Francois Bertrand, Laura
10 Hernandez, and Suhail Hasan.

BACKGROUND OF THE INVENTION

Technical Field of the Invention

15 This invention relates to telecommunication systems and, more particularly, to a method of reducing speech delay in digital transmission systems by implementing a single coder-decoder (codec) for an entire speech path.

Description of Related Art

20 Today, in calls from a first mobile subscriber (MS) to a second MS in a cellular telephone network, two codec translations are performed: (1) a translation from an IS-136-based codec to a G.711 codec in a transcoder unit (TRAU) at the originating mobile switching center (MSC), and (2) a translation from a G.711 codec to an IS-136-based codec at a TRAU in the destination serving MSC. These multiple codec translations introduce speech delay and deterioration of speech quality. In an MS-to-MS call, the end-to-end measured average delay is on the order of 210 to 240
25 milliseconds.

30 For calls being routed over an Internet Protocol (IP) network, H.323, H.225, and H.245 are a family of ITU standards for packet-based multimedia (audio and video) communications systems. This family of standards permits calls between PC-based phone terminals (clients) in the IP network (LAN or WAN), or between client terminals and phone terminals in the Public Switched Telephone Network (PSTN) or the Public Land Mobile Network (PLMN) in an integrated network. An H.323

-2-

Gateway in the H.323 standard provides an interface between the IP network and the PSTN or PLMN, including the audio codec translation.

For a call between an MS in an IS-136 cellular network and an H.323 client in an IP network, the call setup and voice path must go through the H.323 Gateway. Presently, H.323 version 2 Gateways only support G.711 codecs, along with a few other codecs such as G.728. No IS-136-based codecs are supported by the Gateway. Thus, the audio stream, which is transmitted from the calling MS to the originating MSC over the air interface utilizing an IS-136-based codec, must be translated at the originating MSC to G.711. The IS-136-to-G.711 codec translation takes place in a TRAU so that the audio stream coming out of the originating MSC on the pulse code modulation (PCM) link is G.711-coded. When the G.711 codec is utilized between the Gateway and the client, it requires a relatively large packet to transport the 64 Kbs bandwidth required for the voice stream. This worsens the speech delay and jitter problems on the LAN/WAN segment.

Tandem Free Operation (TFO) is an existing methodology utilized to improve speech quality by using only one codec in an MS-to-MS speech path. TFO is applicable only to MS-to-MS calls, however, and does not support calls from an MS to a H.323 client. With TFO, call setup essentially takes place as it normally does without TFO. After the call has been established between the two MSs, a TFO negotiation session begins using inband signaling to establish the type of codec that should be utilized in the call. Only after the completion of this negotiation session does the call get into native codec speech position. As a result, although TFO may improve speech quality by using only one codec in a speech path, there is still an undesirable waiting period in TFO calls before native codec speech can flow due to the TFO negotiation session.

In order to overcome the disadvantage of existing solutions, it would be advantageous to have a method of reducing speech delay in digital transmission systems by implementing a single codec for an entire speech path. Such a method would be performed during call setup, and would not introduce additional speech delays. The present invention provides such a method.

SUMMARY OF THE INVENTION

In one aspect, the present invention is a method of reducing speech delay in digital transmission systems by implementing a single coder- decoder (codec) for an entire speech path from a calling party to a called party. The method includes the steps of sending an indication of a requested codec from the calling party to the called party utilizing out-of-band signaling during call setup, determining by the called party whether the requested codec can be utilized for the call, and sending a confirmation of the requested codec from the called party to the calling party upon determining that the requested codec can be utilized. This is followed by establishing a speech path from the calling party to the called party, and performing a single codec translation for the entire speech path.

In another aspect, the present invention is a method of reducing speech delay in a digital transmission system by implementing a single codec for an entire speech path from a calling mobile subscriber to a called mobile subscriber. The method begins by originating a call from the calling mobile subscriber to a first mobile switching center (MSC) which is serving the calling subscriber, and obtaining a routing number for the called mobile subscriber from a second MSC which is serving the called mobile subscriber. Then, utilizing out-of-band signaling during call setup, an indication of a requested codec type is sent from the first MSC to the second MSC, and a confirmation of the requested codec type is sent from the second MSC to the first MSC. This is followed by establishing a speech path from the calling mobile subscriber to the called mobile subscriber, and performing a single codec translation for the entire speech path.

In yet another aspect, the present invention is a method of reducing speech delay in a digital transmission system by implementing a single codec for an entire speech path from a calling mobile subscriber to a called PC-based client phone terminal in a data network. The method begins by originating a call from the calling mobile subscriber to an MSC which is serving the calling subscriber, and obtaining from a gatekeeper in the data network, an indication of a gateway serving the called client terminal. Then, utilizing out-of-band signaling during call setup, an indication of a requested codec type is sent from the MSC to the gateway, the gateway

determines whether the called client terminal supports the requested codec type, and a confirmation of the requested codec type is sent from the gateway to the MSC. This is followed by establishing a speech path from the calling mobile subscriber to the called client terminal, and performing a single codec translation for the entire speech path.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be better understood and its numerous objects and advantages will become more apparent to those skilled in the art by reference to the following drawings, in conjunction with the accompanying specification, in which:

FIG. 1 (Prior Art) is a simplified block diagram illustrating the existing methodology of Tandem Free Operation (TFO) for an MS-to-MS call;

FIG. 2 is a message flow diagram illustrating the flow of messages between the nodes of a cellular network when an End-to-End Codec (ETEC) process is performed during call setup for an MS-to-MS call according to the teachings of the present invention;

FIG. 3 is a message flow diagram illustrating the flow of messages between the nodes of an integrated cellular and IP network when the ETEC process is performed using Integrated Services Digital Network User Part (ISUP) signaling during call setup and the H.323 Fast Connect procedure for a call from an MS to an H.323 client terminal according to the teachings of the present invention;

FIG. 4 is a message flow diagram illustrating the flow of messages between the nodes of an integrated cellular and IP network when the ETEC process is performed using Primary Rate Interface (PRI) signaling during call setup and the H.323 Fast Connect procedure for a call from an MS to an H.323 client terminal according to the teachings of the present invention;

FIG. 5 is a message flow diagram illustrating the flow of messages between the nodes of an integrated cellular and IP network when the ETEC process is performed using ISUP signaling during call setup, and showing the Terminal Capability exchange and Open Logical Channel process for a call from an MS to an H.323 client terminal according to the teachings of the present invention; and

FIG. 6 is a message flow diagram illustrating the reduction of trans-codings achieved by the present invention in an MS-to-MS call between MSs having different native codecs.

5 DETAILED DESCRIPTION OF EMBODIMENTS

FIG. 1 is a simplified block diagram illustrating the existing methodology of Tandem Free Operation (TFO) for an MS-to-MS call being placed from a first MS (MS-A) 11 to a second MS (MS-B) 12 through a digital network 10. TFO utilizes inband signaling by replacing the least significant bit of every 16th speech sample in
10 PCM with a TFO frame to deliver signals at 500 bits/sec that are embedded in the 64 kbs voice path. If a full rate codec is utilized, TFO frames are transferred in the two least significant bits of every PCM sample.

TRAU-A 13 is associated with MSC-A 14, the originating MSC. TRAU-B 15 is associated with MSC-B 16, the destination serving MSC. The TFO negotiation session begins after Integrated Services Digital Network User Part (ISUP) or Primary Rate Interface (PRI) signaling has led to the seizure of a voice circuit between TRAU-A 13 and TRAU-B 15. TRAU-A determines which codecs are supported by both MS-A 11 and base transceiver station (BTS-A) 17 and sends this information in a first
15 signal called TFO_REQUEST. The TFO_REQUEST signal takes 140 ms to deliver 70 bits of information from TRAU-A to TRAU-B. TRAU-A sends this message for a maximum of 5 seconds until an answer is received. TRAU-B then determines which codecs are supported by both MS-B 12 and BTS-B 18 and sends this information to TRAU-A in a TFO_ACKnowledge signal which also delivers 70 bits in 140 ms. Thus, the total time savings possible by eliminating the TFO negotiation session in the
20 MS-to-MS case is at least 280 ms.

If different codecs are being used on the two sides, one side performs an intracell handoff of the MS to change to the correct codec, based on a predefined prioritization of codecs. TFO is normally established approximately 0.5 seconds after the speech channel is established.

30 The present invention provides an End-to-End Codec (ETEC) process which differs from the TFO process in the following aspects:

(1) ETEC is used during the call setup phase, whereas TFO is used after the call setup phase.

5 (2) ETEC signaling is out-of-band, utilizing Integrated Services Digital Network User Part (ISUP) and/or Primary Rate Interface (PRI) signaling, as opposed to inband signaling for TFO in which negotiation is done on the PCM link normally used for speech.

(3) ETEC extends within packet-based communications systems such as H.323 networks to client terminals through the H.245 protocol, whereas TFO signaling applies only to MS-to-MS calls, and terminates at the Gateway on the IP side.

10 By extending the native codec from end (MS) to end (H.323 client), the speech delay is significantly reduced through the elimination of codec translations. The present invention reduces the speech delay caused by the codec translation in MS-to-MS calls and in MS to/from H.323 client calls. The ETEC process eliminates the conversion of codec types by using only one codec, end-to-end, for the whole call path. In the case of a call from an MS to an H.323 client, the audio stream from
15 cellular air interface codecs (IS-136-based VCELP, ACELP, US-1, GSM, or CDMA) is passed unaltered. At the client terminal, the audio stream is converted to speech directly. Two scenarios utilizing ETEC are described below.

20 MS to/from MS

FIG. 2 is a message flow diagram illustrating the flow of messages between the nodes of a cellular network when the ETEC process is performed during call setup for an MS-to-MS call according to the teachings of the present invention. A first MS (MS-1) 21 originates call setup at 22 over the IS-136 air interface to the originating
25 Base Transceiver Station/Mobile Switching Center (BTS/MSC-1) 23. One of the IS-136-based codecs utilized for the call segment over the air, for example, an Algebraic Code Excited Linear Prediction (ACELP) codec may be utilized as today. Other codecs which may be utilized include Vector Sum Excitation Linear Prediction (VSELP), Regular Pulse Excitation-Long Term Predictor (RPE-LTP), and Conjugate
30 Structure-Algebraic Code Excited Linear Prediction (CS-ACELP).

In the originating BTS/MSC-1 23, the TRAU that normally provides the

-7-

transcoding from ACELP to G.711 is bypassed. The process of obtaining the routing number or Temporary Location Directory Number (TLDN) of the called MS-2 takes place according to ANSI-41 as today. The originating BTS/MSC-1 sends a Location Request (LocReq) Invoke message 24 to the Home Location Register (HLR) 25 to
5 obtain location information for the called MS. The HLR sends a Routing Request (RouteReq) Invoke message 26 to the serving BTS/MSC-2 27. The serving BTS/MSC-2 sends a page 28 to the called MS-2 29 which sends a response at 30. The serving BTS/MSC-2 then sends a RouteReq Return Result (RR) message 31 to the HLR and includes the TLDN of the called MS. The HLR then sends a LocReq RR 32
10 to the originating BTS/MSC-1 and includes the TLDN.

The originating BTS/MSC-1 23 then routes the call to the serving BTS/MSC-2 27 through an ISUP Initial Address Message (IAM) 33 containing, in the User-to-User parameter, an indication of the requested codec (e.g. ACELP). The ISUP IAM call setup message is received by the serving BTS/MSC-2 with the User-to-User parameter
15 indicating the requested codec to be used in the call.

At 34, the serving BTS/MSC-2 27 notifies the called MS-2 29 of the incoming call, and the MS-2 returns a phone ring signal 35. The serving BTS/MSC-2 then sends an Address Complete Message (ACM) 36 to the originating BTS/MSC-1 23 and includes a confirmation of the requested codec. If the radio interface between the
20 serving BTS/MSC-2 and the MS does not support the native codec choice of MS-1 21, the serving BTS/MSC-2 reverts back to default ISUP signaling and sends a standard ACM message. In this case, the G.711/PCM codec is utilized between the two MSCs, as is today. However, even in this case involving different native mobile codecs, BTS/MSC-2 can, in certain situations, send an ACM message with confirmation of the
25 native codec of the calling party (MS-1). This utilization of the calling party's codec occurs only if BTS/MSC-2 is capable of transcoding between the two native codecs. The prioritization of codec selection is based on the native codec choice of the calling party, MS-1. As shown later in FIG. 6, this reduces the number of transcodings and thus helps improve speech quality for the audio stream in the call.

30 The originating BTS/MSC-1 then provides a ringing tone 37 to the calling MS-1 21. The called MS-2 then sends a connect signal 38 to the serving BTS/MSC-2.

-8-

The serving BTS/MS-2 then sends an Answer Message (ANM) 39 to the originating BTS/MS-1. The originating BTS/MS-1 then connects the call to the calling MS-1 at 40.

Thus, in the present intention, there is no transcoding in the originating MSC to G.711 (on PCM), and there is no transcoding back from G.711 (from PCM) to an IS-136 codec. Thus, the ETEC process passes the audio stream of the selected codec directly unaltered from the calling MS-1 to the called MS-2. This results in improved speech quality and reduced speech delay. In the segment between the originating BTS/MS-1 and the serving BTS/MS-2, the audio stream (<64kb) is passed through the 64kb PCM link. A bit-stuffing mechanism may be utilized to fit the audio stream through the 64kb PCM link.

MS to/from H.323 Client

FIGS. 3-5 illustrate three scenarios for calls from an MS-1 to an H.323 client terminal. As noted above, there is no support under TFO for such calls because TFO is designed only for MS-to-MS calls.

FIG. 3 is a message flow diagram illustrating the flow of messages between the nodes of an integrated cellular and IP network when the ETEC process is performed using ISUP signaling during call setup and the H.323 Fast Connect procedure for a call from an MS to an H.323 client terminal according to the teachings of the present invention. The calling MS-1 21 originates call setup at 41 over the IS-136 air interface to the originating BTS/MS-1 23. One of the IS-136-based codecs utilized for the call segment over the air, for example, an ACELP codec may be utilized as today. In the originating BTS/MS-1, the TRAU that normally provides the transcoding from ACELP to G.711 is bypassed. The originating BTS/MS-1 sends a LocReq Invoke message 42 to the HLR 25 to obtain location information for the called H.323 client terminal.

The HLR obtains the location of the called H.323 terminal by sending an H.323 Location Request (LRQ) message 43 to a Gatekeeper (GK) 44 which returns the location information in an H.323 Location Confirm (LCF) message 45. The HLR then sends a LocReq RR message 46 to the originating BTS/MS-1 with the location

information (i.e., Gateway 47).

The originating MSC then sends an ISUP IAM message 48 to the Gateway (GW) 47 and includes, in the User-to-User parameter, an indication that the requested codec is an ACELP codec. The Gateway 47 initiates Registration, Access and Status (RAS) messages toward the Gatekeeper for admission to the LAN/WAN network as normal. The Gateway sends an Admission Request (ARQ) message 49 to the Gatekeeper 44 which returns an Admission Confirm (ACF) message 50. To speed up the H.245 capability exchange process and subsequent choice of native codec, the H.323 Fast Connect procedure may be utilized at this point. This procedure includes H.245 information as part of the H.225 Q.931 Setup User-to-User information entity field. An H.225 fastStart option supports the signaling needed to open a logical channel. The fastStart option uses the Open Logical Channel structure defined in H.245, but the sender indicates the modes it prefers for transmitting and receiving, and the transport address where it expects to receive media streams.

In the scenario illustrated in FIG. 3, the Fast Connect procedure is utilized, therefore, the Gateway 47 sends a Q.931 Setup message 51 to the called H.323 terminal 52 and includes an indication that the Fast Connect procedure is being utilized, and an indication that the requested codec is an ACELP codec. The called H.323 terminal responds by sending a Q.931 Proceeding signal 53 to the Gateway. H.225 RAS messages are then exchanged between the H.323 terminal 52 and the Gatekeeper 44 as the H.323 terminal sends an ARQ message 54 to the Gatekeeper, and the Gatekeeper returns an ACF message 55 to the terminal. The H.323 terminal then sends a Q.931 Alerting signal 56 to the Gateway. The Gateway then sends an ISUP ACM message 57 to the originating BTS/MS-1 23, and includes a confirmation of the requested codec. If the H.323 terminal does not support the native codec choice of MS-1 21, the Gateway reverts back to default ISUP signaling and sends a standard ACM message. In this case, the G.711/PCM codec is utilized between the two MSCs, as today. Otherwise, the called H.323 terminal then sends a Q.931 Connect signal 58 to the Gateway. The Gateway then sends an ISUP ANM message 59 to the originating BTS/MS-1.

FIG. 4 is a message flow diagram illustrating the flow of messages between the

nodes of an integrated cellular and IP network when the ETEC process is performed using PRI signaling during call setup and the H.323 Fast Connect procedure for a call from an MS to an H.323 client terminal according to the teachings of the present invention. The calling MS-1 21 originates call setup at 61 over the IS-136 air interface to the originating BTS/MS-1 23. One of the IS-136-based codecs utilized for the call segment over the air, for example, an ACELP codec may be utilized as today. In the originating BTS/MS-1, the TRAU that normally provides the transcoding from ACELP to G.711 is bypassed. The originating BTS/MS-1 sends a LocReq Invoke message 62 to the HLR 25 to obtain location information for the called H.323 Terminal 52.

The HLR obtains the location of the called H.323 Terminal by sending an H.323 LRQ message 63 to the Gatekeeper (GK) 44 which returns the location information in an H.323 LCF message 64. The HLR then sends a LocReq RR message 65 to the originating BTS/MS-1 with the location information (i.e., Gateway 47).

The originating MSC then sends a PRI Setup message 66 to the Gateway 47 and includes, in the User-User parameter, an indication that the requested codec is an ACELP codec. The Gateway initiates RAS messages toward the Gatekeeper for admission to the LAN/WAN network as normal. The Gateway sends an ARQ message 67 to the Gatekeeper 44 which returns an ACF message 68. The Gateway examines the requested codec type. Based on the bandwidth of the incoming codec stream, a different window size is used to minimize delay. For larger bandwidth streams such as G.711, a smaller window size is selected such as 10 milliseconds. Compressed audio streams such as GSM may be allocated larger window sizes.

In the scenario illustrated in FIG. 4, the H.323 Fast Connect procedure is utilized, therefore, the Gateway 47 sends a Q.931 Setup message 69 to the called H.323 client terminal 52 and includes an indication that the Fast Connect procedure is being utilized, and an indication that the requested codec is an ACELP codec. The called H.323 terminal responds by sending a Q.931 Proceeding signal 70 to the Gateway. H.225 RAS messages are then exchanged between the H.323 terminal 52 and the Gatekeeper 44 as the H.323 terminal sends an ARQ message 71 to the

Gatekeeper, and the Gatekeeper returns an ACF message 72 to the terminal. The H.323 terminal then sends a Q.931 Alerting signal 73 to the Gateway. The Gateway then sends a PRI Alerting message 74 to the originating BTS/MS-1 23, and includes a confirmation of the requested codec. If the H.323 terminal does not support the native codec choice of MS-1 21, the Gateway reverts back to default ISUP signaling and sends a standard PRI Alerting message. In this case, the G.711/PCM codec is utilized between the two MSCs, as today. Otherwise, the called H.323 terminal then sends a Q.931 Connect signal 75 to the Gateway. The Gateway then sends a PRI Connect message 76 to the originating BTS/MS-1.

FIG. 5 is a message flow diagram illustrating the flow of messages between the nodes of an integrated cellular and IP network for endpoints not supporting H.323 version 2 or better, when the ETEC process is performed using ISUP signaling during call setup, and showing the Terminal Capability exchange and Open Logical Channel process for a call from an MS to an H.323 client terminal according to the teachings of the present invention. The calling MS-1 21 originates call setup at 81 over the IS-136 air interface to the originating BTS/MS-1 23. One of the IS-136-based codecs utilized for the call segment over the air, for example, an ACELP codec may be utilized as today. In the originating BTS/MS-1, the TRAU that normally provides the transcoding from ACELP to G.711 is bypassed. The originating BTS/MS-1 sends a LocReq Invoke message 82 to the HLR 25 to obtain location information for the called H.323 Terminal 52.

The HLR obtains the location of the called H.323 client terminal by sending an H.323 LRQ message 83 to the Gatekeeper (GK) 44 which returns the location information in an H.323 LCF message 84. The HLR then sends a LocReq RR message 85 to the originating BTS/MS-1 with the location information (i.e., Gateway 47).

The originating MSC then sends an ISUP IAM message 86 to the Gateway (GW) 47 and includes, in the User-to-User parameter, an indication that the requested codec is an ACELP codec. The Gateway 47 sends an ARQ message 87 to the Gatekeeper 44 which returns an ACF message 88.

In the scenario illustrated in FIG. 5, the H.323 Fast Connect procedure is

-12-

utilized, therefore, the Gateway 47 sends a Q.931 Setup message 89 to the called H.323 terminal 52 and includes an indication that the Fast Connect procedure is being utilized, and an indication that the requested codec is an ACELP codec. The called H.323 terminal responds by sending a Q.931 Proceeding signal 90 to the Gateway.

5 H.225 RAS messages are then exchanged between the H.323 terminal 52 and the Gatekeeper 44 as the H.323 terminal sends an ARQ message 91 to the Gatekeeper, and the Gatekeeper returns an ACF message 92 to the terminal. The H.323 terminal then sends a Q.931 Alerting signal 93 and a Q.931 Connect signal 94 to the Gateway.

An H.245 session then commences between the Gateway and the client terminal. H.225 signaling takes place normally between the Gateway and the client terminal 52 resulting in a reliable H.245 channel being established. A capability exchange procedure is performed between the Gateway and the terminal, and during this procedure, an H.245 Terminal Capability exchange is performed at 95 and 96, and the requested codec is confirmed. The Gateway then sends an ISUP ACM message

10 97 to the originating BTS/MS-1 23, and includes a confirmation of the requested codec.

An H.245 Master/Slave Detection Exchange is then performed at 98 and 99 between the Terminal and the Gateway. At 100 and 101, an Open Logical Channel exchange is performed between the Terminal and the Gateway. The Gateway then

20 sends an ISUP ANM message 102 to the originating BTS/MS-1.

The H.245 signaling results in a Real Time Protocol (RTP) unreliable channel being opened on the LAN/WAN between the H.323 Client and Gateway. Within the RTP header, the Payload Type field is used to identify the codec chosen and H.245. A Unique Payload type number is assigned to each codec used. This number is used

25 by RTP at the Gateway and the H.323 client to ensure that the voice stream is sent to the correct codec.

As a result, the audio stream of the selected codec is passed directly unaltered from the air interface to the H.323 Client. In the segment between the originating MSC and the H.323 Gateway, the audio stream (<64Kb) is passed through the 64Kb

30 PCM link. Bit stuffing may be utilized to fit the audio stream through the 64Kb PCM link. Thus, in the present intention, there is no transcoding in the originating MSC to

G.711 (on PMC), and there is no transcoding back from G.711 to the codec supported by the client. This results in improved speech quality and reduced speech delay.

FIG. 6 is a message flow diagram illustrating the reduction of transcodings achieved by the present invention in an MS-to-MS call between MSs having different native codecs. In this scenario, MS1 105 utilizes a different native codec than MS2 106. For example, MS1 may utilize an ACELP codec while MS2 utilizes a GSM-EFR codec. MSC1 107 is the serving MSC for MS1 and MSC2 108 is the serving MSC for MS2.

Line 1 illustrates exemplary codecs utilized in an MS-to-MS call as today. As shown, two transcodings are required, one from GSM EFR to PCM G.711, and one from PCM G.711 to IS-136. Line 2 illustrates the situation in which the present invention is utilized, and MSC1 107 and MSC2 108 understand the GSM EFR codec, but MS2 106 does not. In this case, the number of transcodings is reduced by the present invention to one. Line 3 illustrates the situation in which the present invention is utilized, and both MSs and both MSCs understand the GSM EFR codec. In this case, GSM EFR is utilized throughout the call, and no additional transcodings are required.

It is thus believed that the operation and construction of the present invention will be apparent from the foregoing description. While the method, apparatus and system shown and described has been characterized as being preferred, it will be readily apparent that various changes and modifications could be made therein without departing from the scope of the invention as defined in the following claims.

WHAT IS CLAIMED IS:

1. A method of reducing speech delay and improving speech quality in digital transmission systems by implementing a single coder-decoder (codec) for an entire speech path from a calling party to a called party, said method comprising the steps of:

5 sending an indication of a requested codec from the calling party to the called party utilizing out-of-band signaling during call setup;

10 determining by the called party whether the requested codec can be utilized for the call; and

sending a confirmation of the requested codec from the called party to the calling party upon determining that the requested codec can be utilized.

2. The method of reducing speech delay and improving speech quality of claim 1 further comprising the steps of:

15 establishing a speech path from the calling mobile subscriber to the called client terminal; and

performing a single codec translation for the entire speech path.

20 3. The method of reducing speech delay and improving speech quality of claim 1 wherein the call is placed between two mobile subscribers, each of which is utilizing a different codec type, and the method further comprises upon determining that the requested codec cannot be utilized for the call, the step of determining whether the calling party's codec type or the called party's codec type has a higher priority

25 based on a predefined prioritization of codecs.

4. The method of reducing speech delay and improving speech quality of claim 1 wherein the call is placed between a first mobile subscriber being served by a first Base Transceiver Station/Mobile Switching Center (BTS/MSC-1) and a second mobile subscriber being served by a second Base Transceiver Station/Mobile Switching Center (BTS/MSC-2), each of the mobile subscribers utilizing a different

30

codec type, and the method further comprises upon determining that the requested codec cannot be utilized for the call, the step of determining whether the calling party's codec type or the called party's codec type has a higher priority based on a the capability of BTS/MSC-1 and BTS/MSC-2 to transcode from the different codecs.

5

5. The method of reducing speech delay and improving speech quality of claim 1 wherein the out-of-band signaling is performed utilizing Integrated Services Digital Network User Part (ISUP) messages.

10

6. The method of reducing speech delay and improving speech quality of claim 1 wherein the out-of-band signaling is performed utilizing Primary Rate Interface (PRI) messages.

15

7. The method of reducing speech delay and improving speech quality of claim 1 wherein the call is placed between a mobile subscriber and a client terminal in a data network.

20

8. The method of reducing speech delay and improving speech quality of claim 7 wherein the indication of the requested codec and the confirmation of the requested codec are sent in messages utilizing the H.245 signaling protocol.

25

9. A method of reducing speech delay and improving speech quality in a digital transmission system by implementing a single coder-decoder (codec) for an entire speech path from a calling mobile subscriber to a called mobile subscriber, said method comprising the steps of:

originating a call from the calling mobile subscriber to a first mobile switching center (MSC) which is serving the calling subscriber;

obtaining a routing number for the called mobile subscriber from a second MSC which is serving the called mobile subscriber;

30

utilizing out-of-band signaling during call setup, said signaling step comprising the steps of:

-16-

sending an indication of a requested codec type from the first MSC to the second MSC; and

sending a confirmation of the requested codec type from the second MSC to the first MSC;

5 establishing a speech path from the calling mobile subscriber to the called mobile subscriber; and

performing a single codec translation for the speech path.

10 10. A method of reducing speech delay and improving speech quality in a digital transmission system by implementing a single coder-decoder (codec) for an entire speech path from a calling mobile subscriber to a called client terminal in a data network, said method comprising the steps of:

originating a call from the calling mobile subscriber to a mobile switching center (MSC) which is serving the calling subscriber;

15 utilizing out-of-band signaling during call setup, said signaling step comprising the steps of:

sending an indication of a requested codec type from the MSC to a gateway in the data network serving the called client terminal;

20 determining whether the called client terminal supports the requested codec type; and

sending a confirmation of the requested codec type from the gateway to the MSC, upon determining that the called client terminal supports the requested codec type;

25 establishing a speech path from the calling mobile subscriber to the called client terminal; and

performing a single codec translation for the speech path.

30 11. The method of reducing speech delay and improving speech quality of claim 10 wherein the step of determining whether the called client terminal supports the requested codec type is performed utilizing a H.323 Fast Connect procedure.

-17-

12. The method of reducing speech delay and improving speech quality of claim 11 wherein the steps of sending an indication of a requested codec type from the MSC to the gateway, and sending a confirmation of the requested codec type from the gateway to the MSC are performed utilizing Integrated Services Digital Network User Part (ISUP) signaling.

5

13. The method of reducing speech delay and improving speech quality of claim 11 wherein the steps of sending an indication of a requested codec type from the MSC to the gateway, and sending a confirmation of the requested codec type from the gateway to the MSC are performed utilizing Primary Rate Interface (PRI) signaling.

10

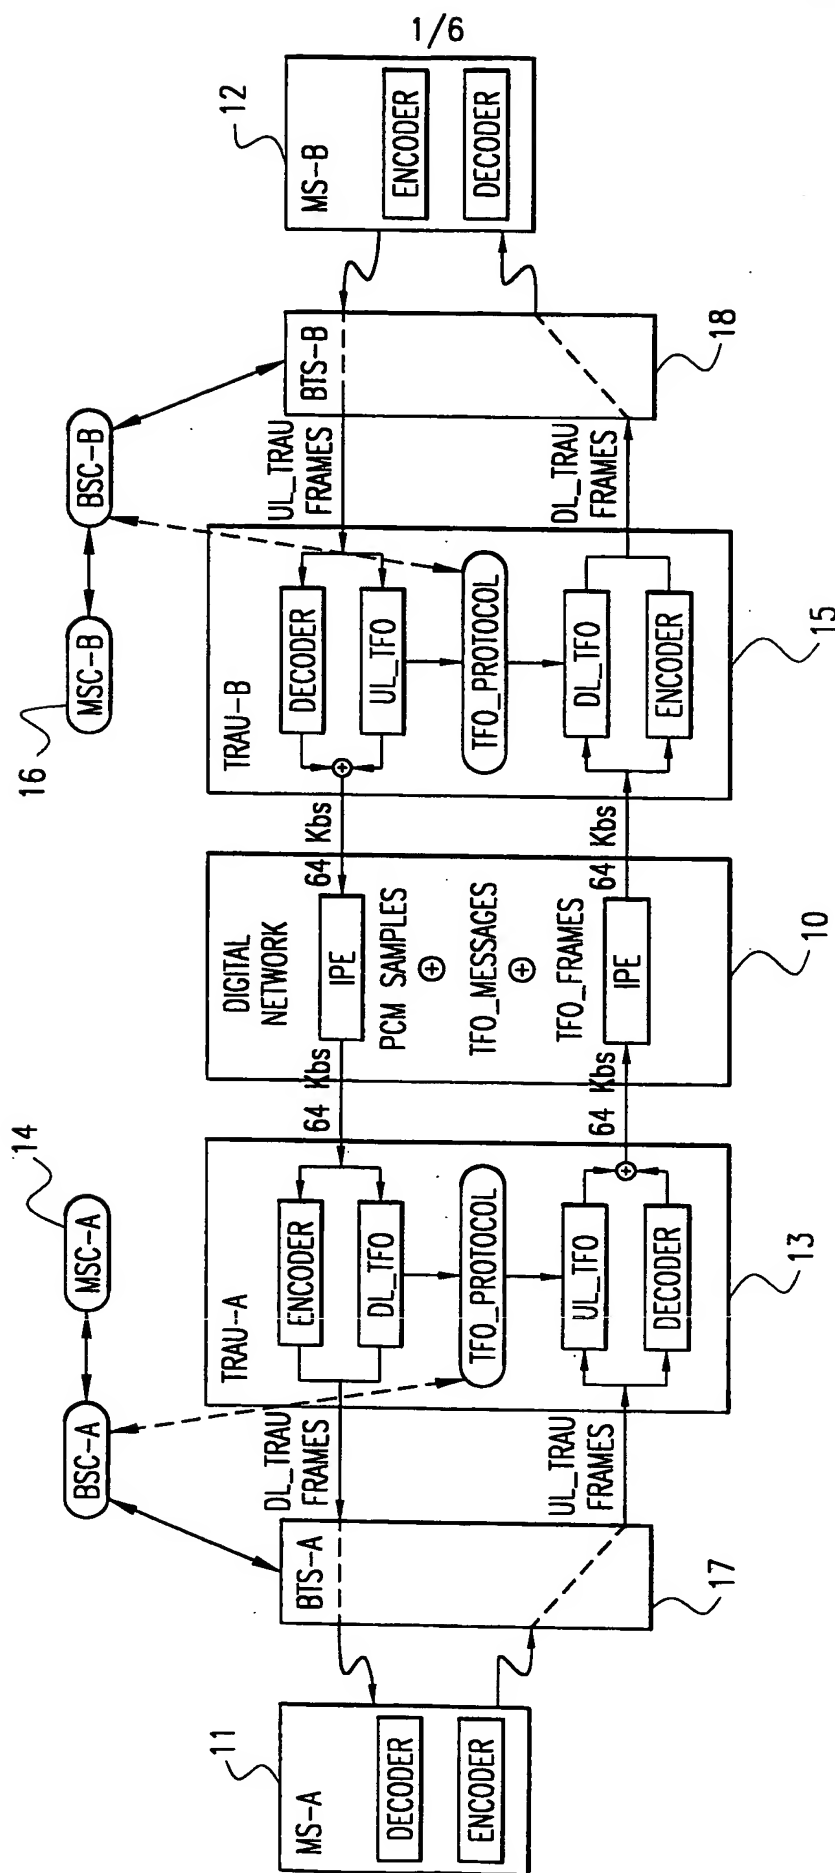


FIG. 1
(PRIOR ART)

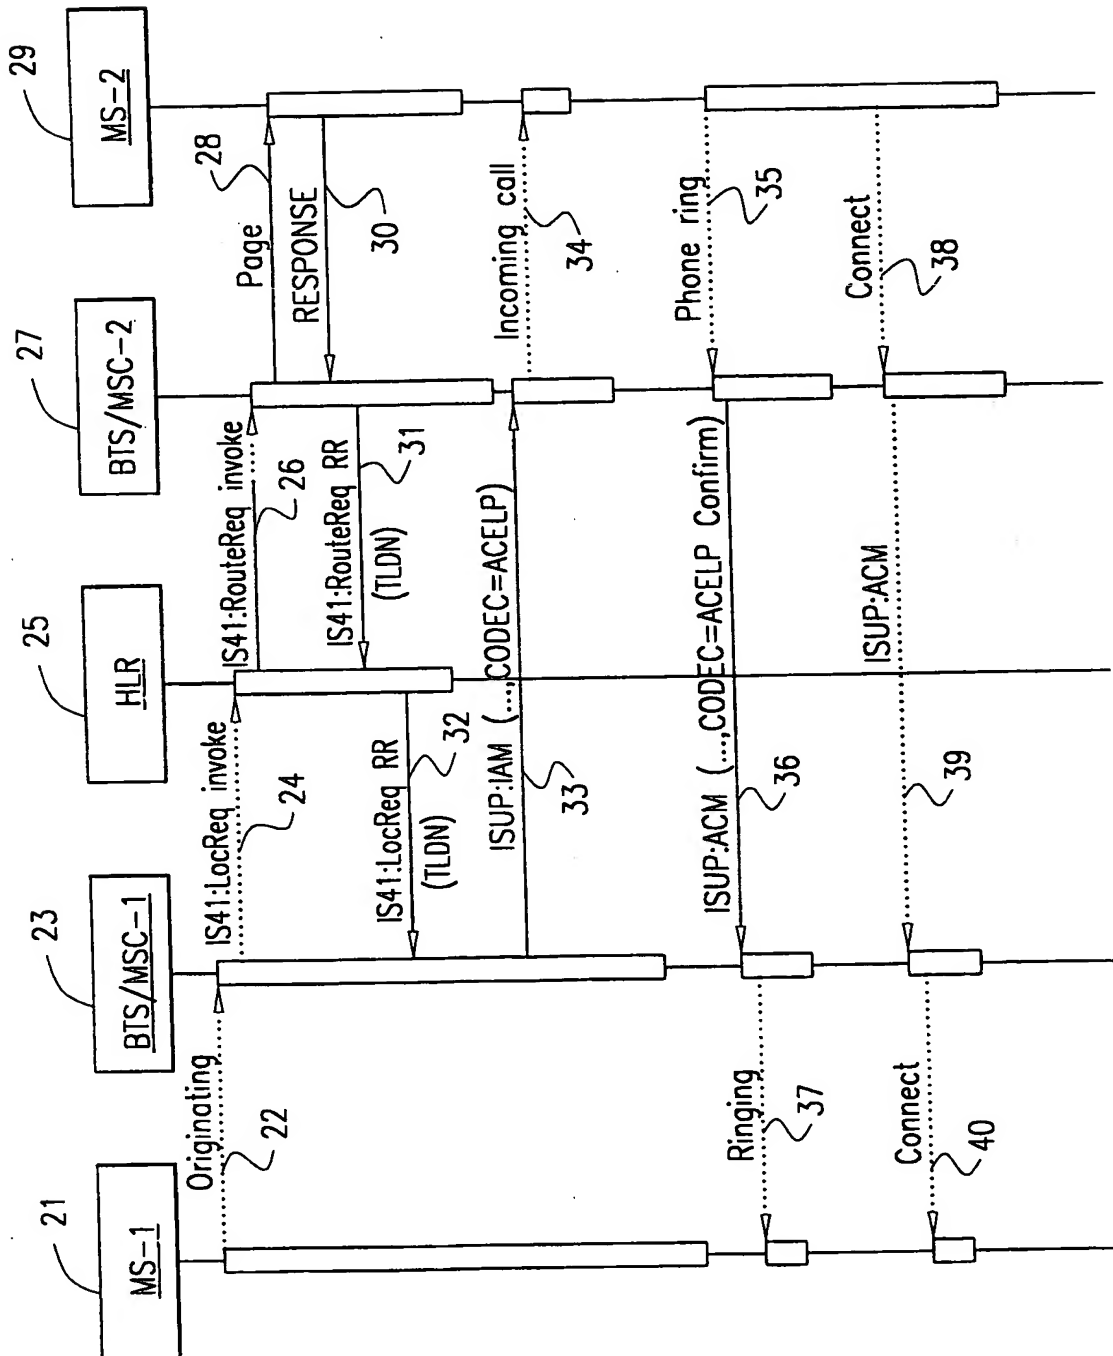


FIG. 2

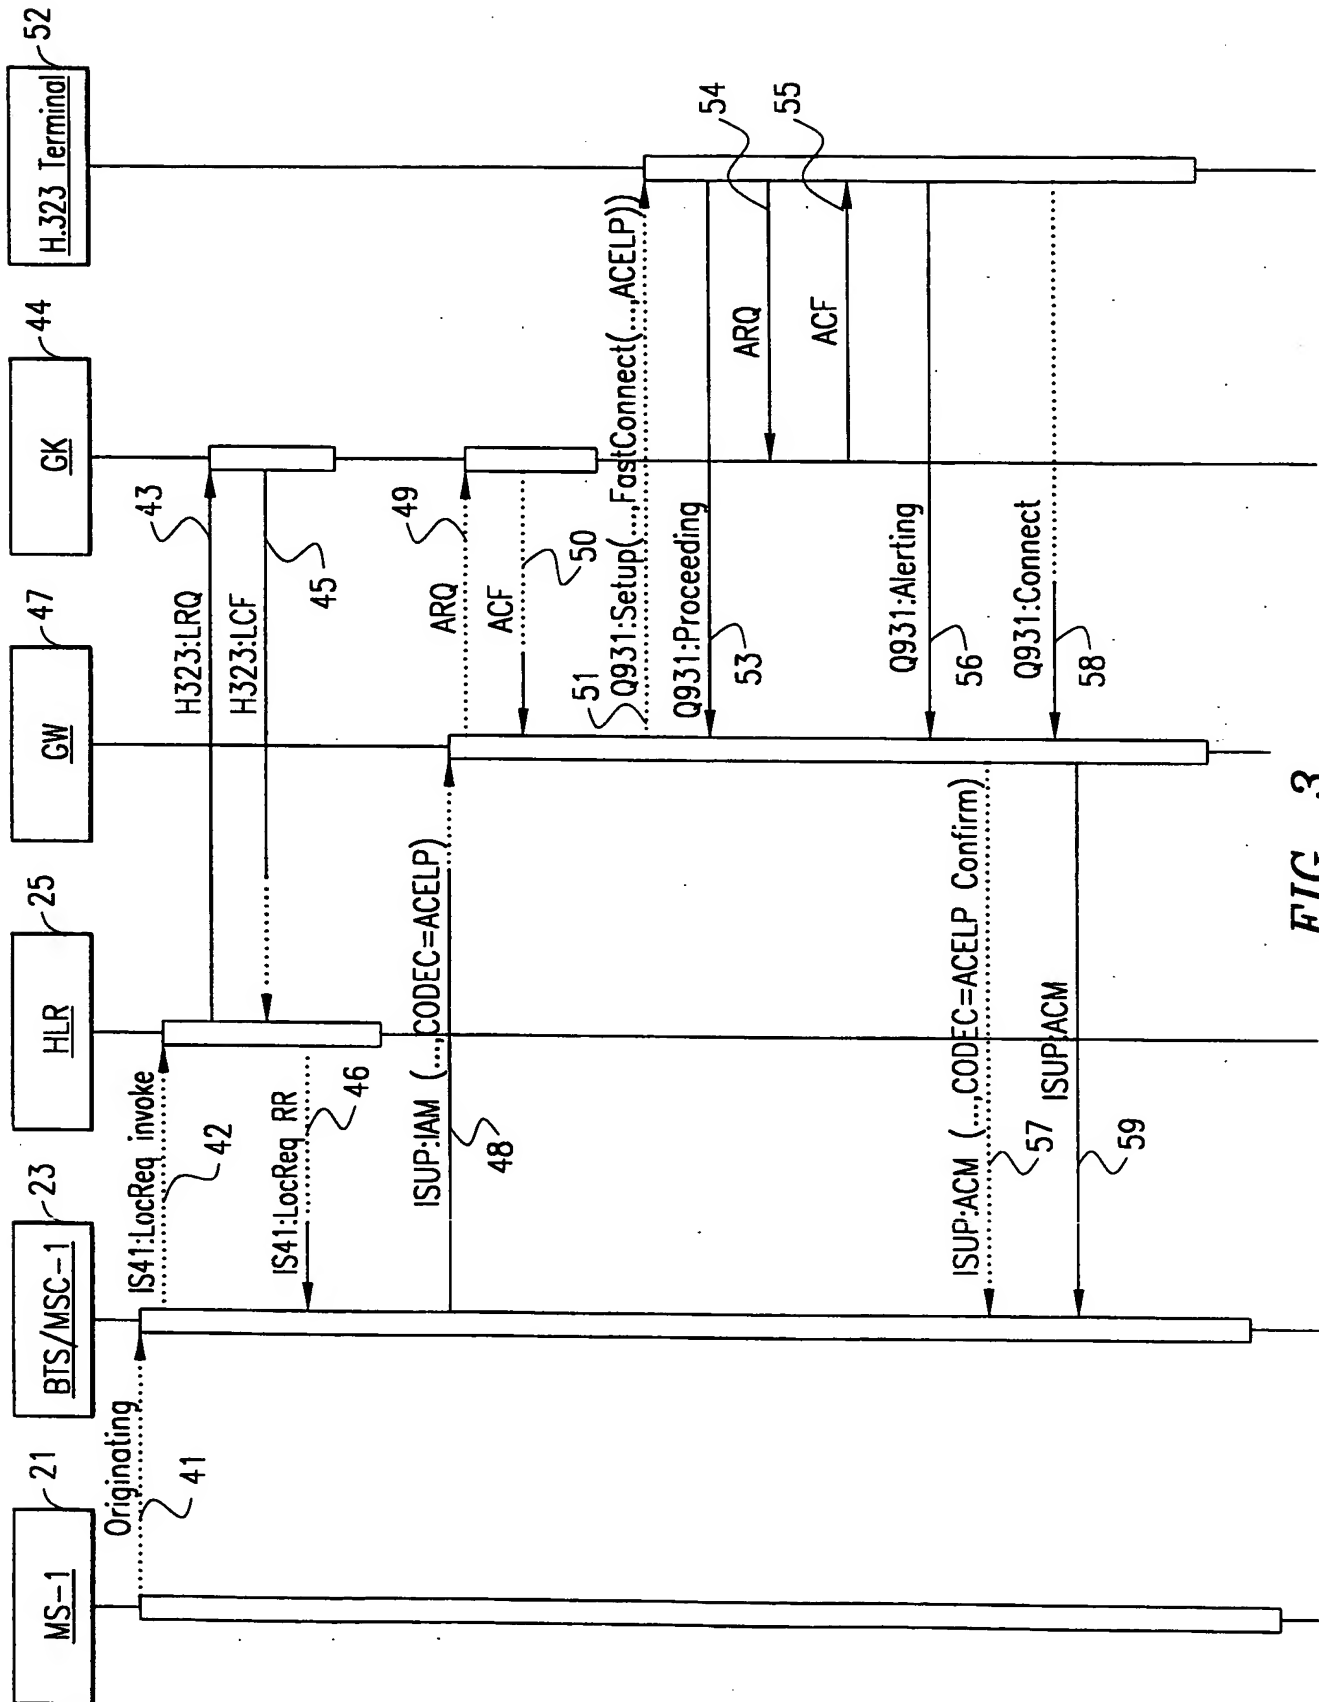


FIG. 3

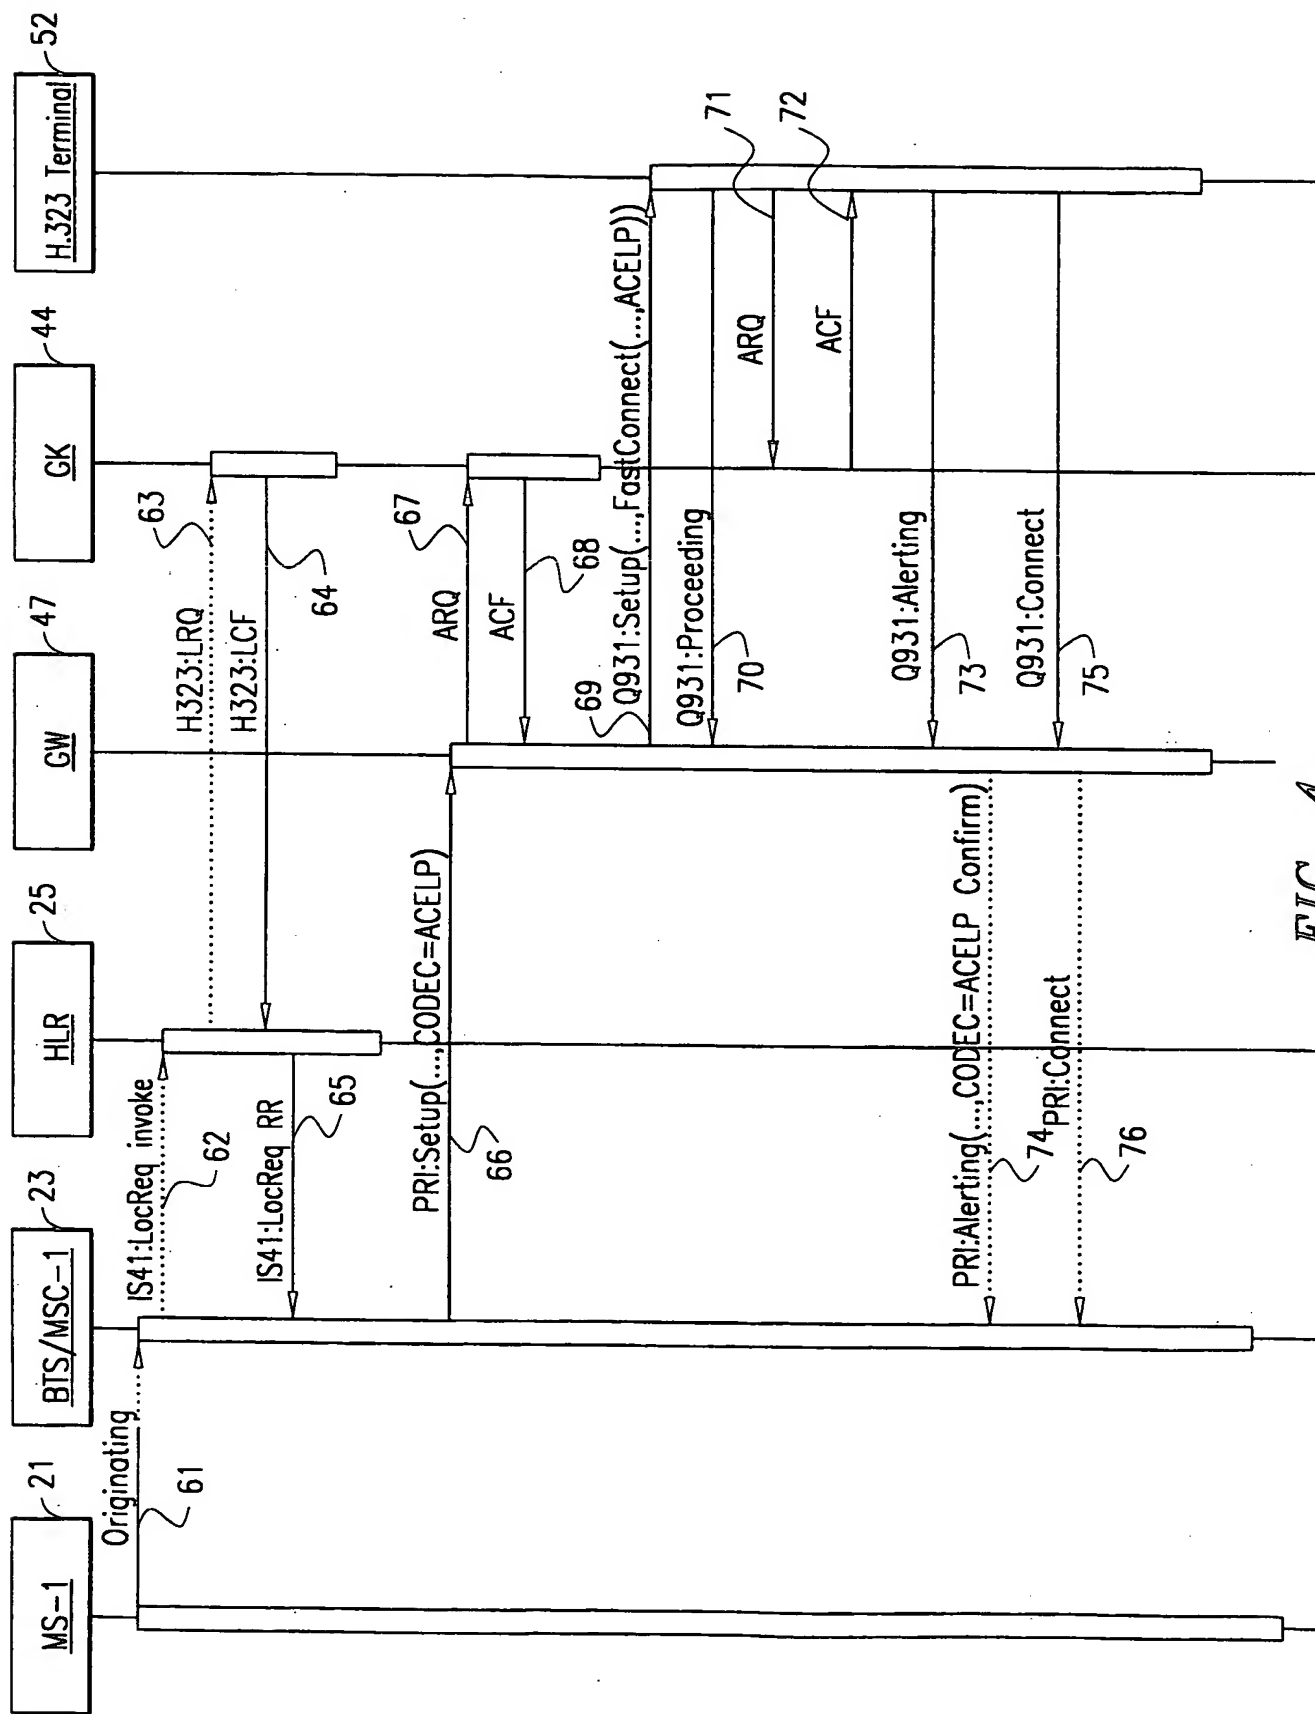


FIG. 4

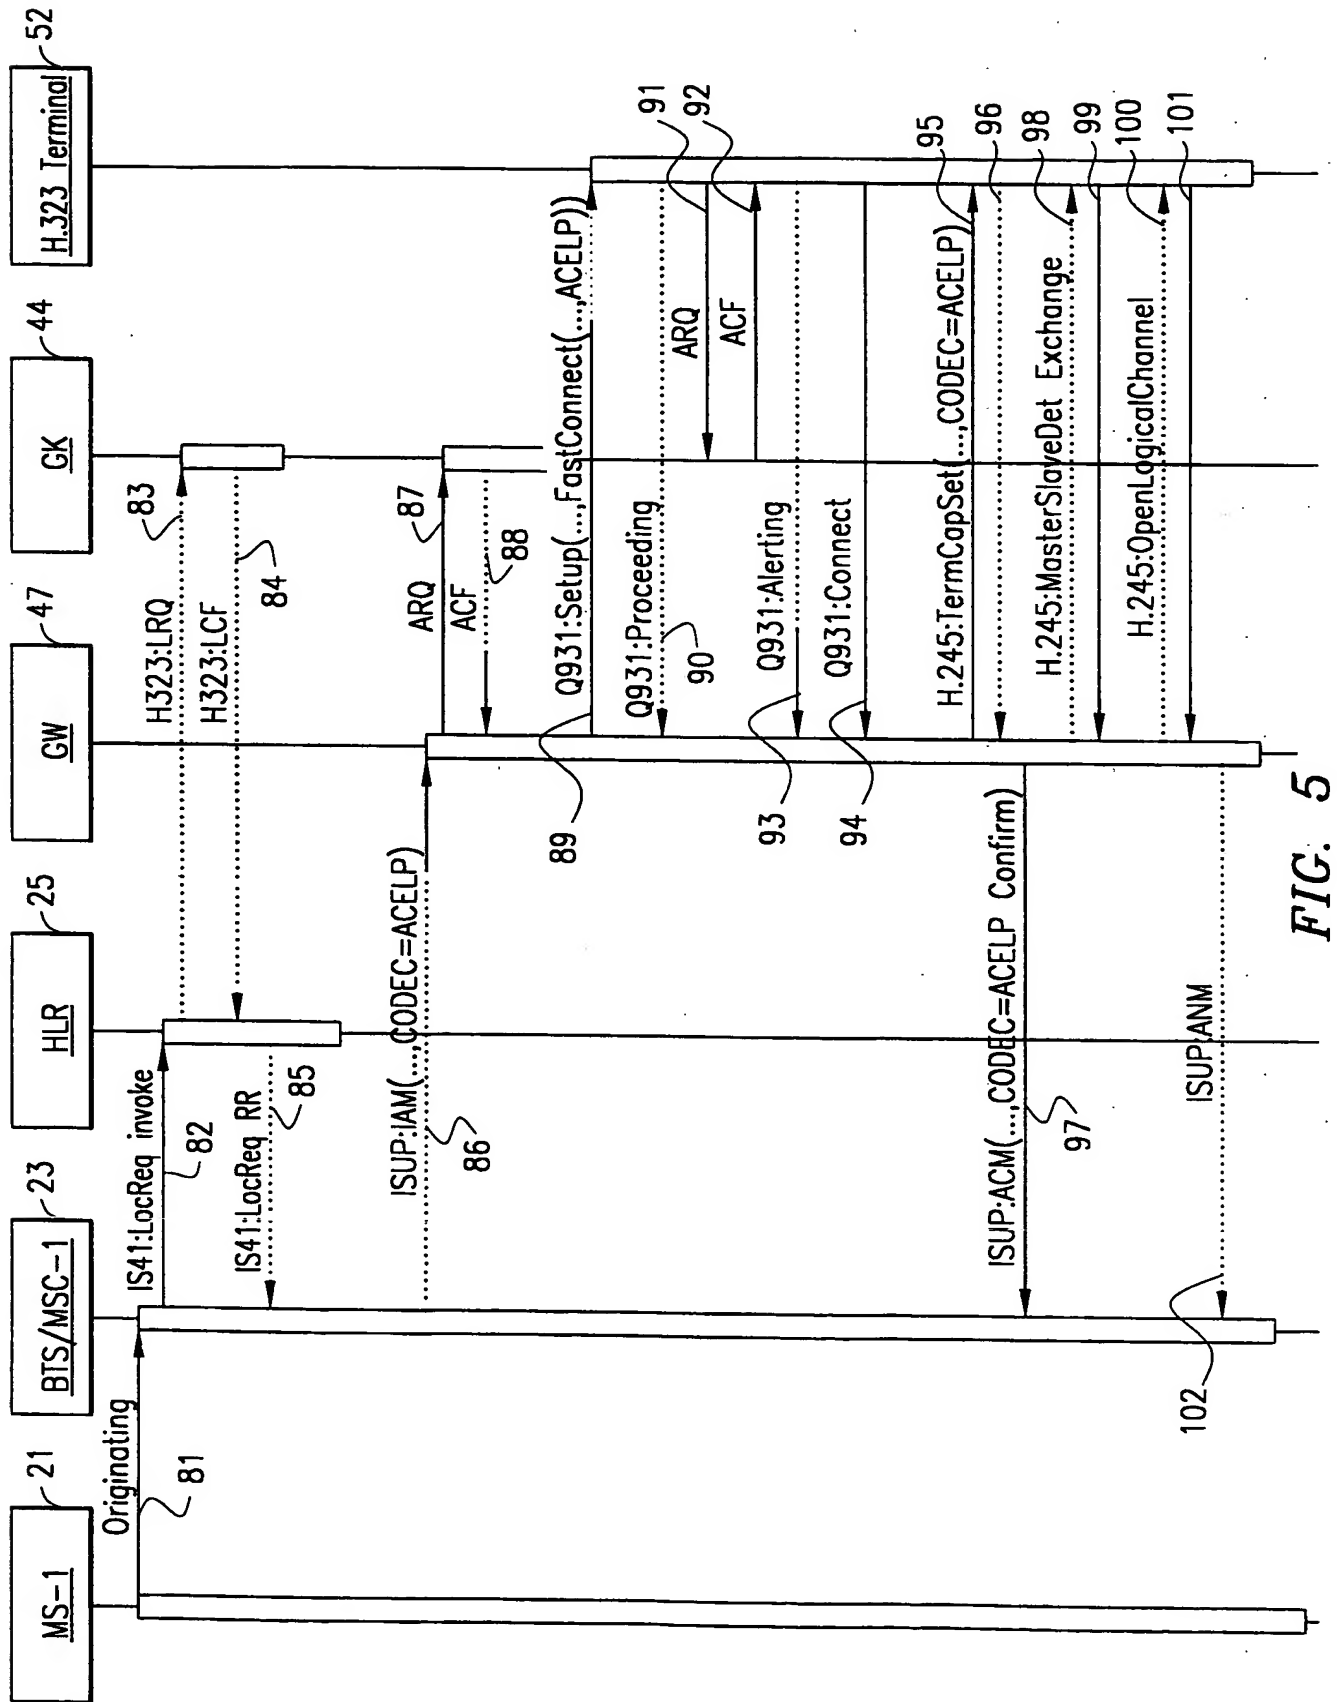
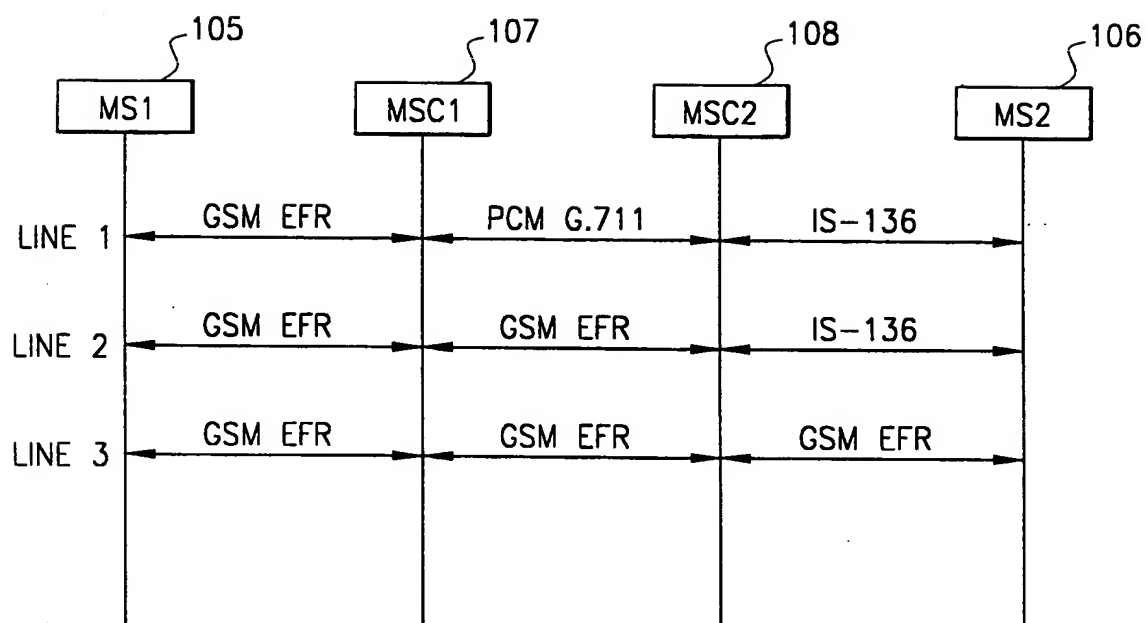


FIG. 5

**FIG. 6**

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 99/02164

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q7/30 H04M7/00 H04L12/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q H04M H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 196 00 406 A (MOTOROLA INC) 18 July 1996 (1996-07-18) column 2, line 18 -column 6, line 43	1
X	MASAMI YABUSAKI ET AL: "VOICE COMMUNICATION CONNECTION CONTROL IN DIGITAL PUBLIC LAND MOBILE NETWORKS" IEICE TRANSACTIONS ON FUNDAMENTALS OF ELECTRONICS, COMMUNICATIONS AND COMPUTER SCIENCES, JP, INSTITUTE OF ELECTRONICS INFORMATION AND COMM. ENG. TOKYO, vol. E75-A, no. 12, 1 December 1992 (1992-12-01), pages 1702-1709, XP000339157 ISSN: 0916-8508 page 1704, left-hand column, line 22 -page 1705, right-hand column, line 29 -/-	9

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

28 April 2000

Date of mailing of the international search report

10/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Baas, G

INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 99/02164

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 02713 A (ERICSSON TELEFON AB L M) 23 January 1997 (1997-01-23) page 6, line 8 -page 9, line 18	9
X	US 5 608 779 A (KASHEF HOOMAN ET AL) 4 March 1997 (1997-03-04) column 8, line 35 -column 10, line 2	9
A	EP 0 750 441 A (NIPPON TELEGRAPH & TELEPHONE) 27 December 1996 (1996-12-27) column 10, line 5 -column 11, line 6 column 11, line 52 -column 15, line 29	1,9
A	YASUDA S ET AL: "NETWORK FUNCTIONS FOR THE APPLICATION OF MULTI-RATE SPEECH CODING IN DIGITAL CELLULAR SYSTEMS" PROCEEDINGS OF THE VEHICULAR TECHNOLOGY CONFERENCE, US, NEW YORK, IEEE, vol. CONF. 44, 1994, pages 306-310, XP000496684 page 308, left-hand column, line 7 -page 309, left-hand column, line 19	1,9
P,X	WO 99 31911 A (ERICSSON TELEFON AB L M) 24 June 1999 (1999-06-24) page 17, line 12 -page 28, line 24	1,2,7,8, 10,11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 99/02164

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 19600406	A	18-07-1996	NONE	
WO 9702713	A	23-01-1997	US 5867784 A	02-02-1999
			AU 708474 B	05-08-1999
			AU 6326296 A	05-02-1997
			CA 2226249 A	23-01-1997
			CN 1194082 A	23-09-1998
			EP 0836788 A	22-04-1998
			JP 11509055 T	03-08-1999
US 5608779	A	04-03-1997	NONE	
EP 0750441	A	27-12-1996	WO 9622003 A	18-07-1996
			JP 2864051 B	03-03-1999
			US 5991642 A	23-11-1999
WO 9931911	A	24-06-1999	DE 19756191 A	24-06-1999
			AU 2054299 A	05-07-1999